


FOREQUARTER CUTTER Model 50CL

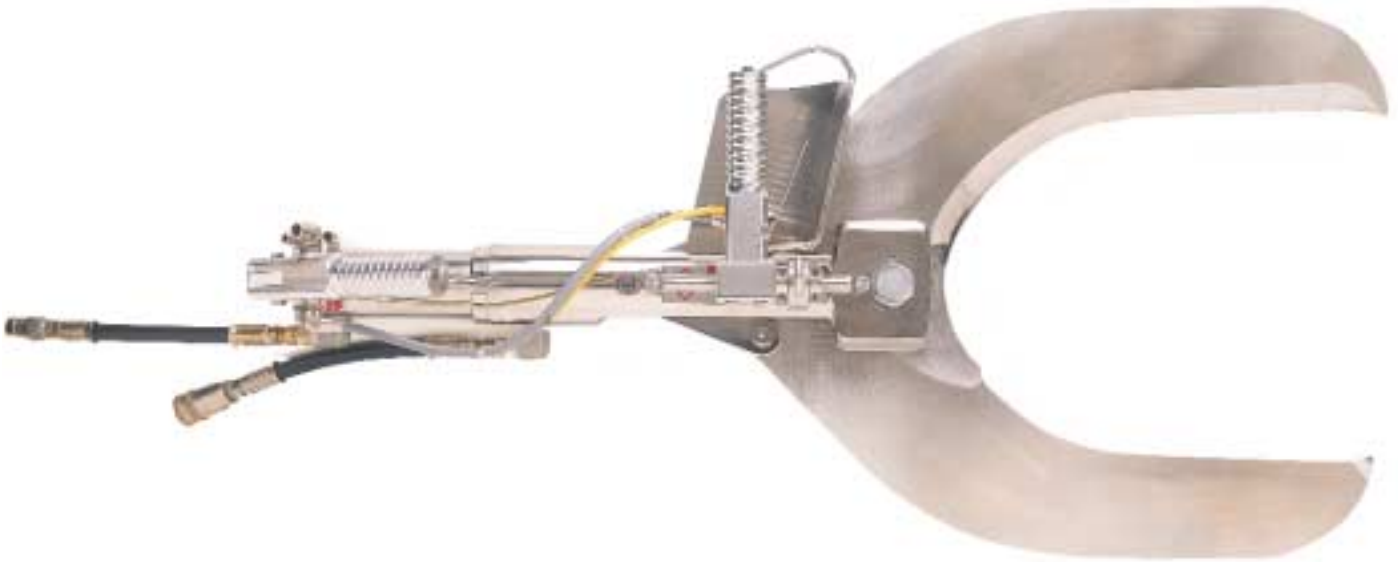

**The Jarvis Model 50CL -
hydraulic powered forequarter and
loin dropper.**

JARVIS

- The 50CL quickly and easily severs the loins or forequarters from beef.
- Fast - a single operator can handle up to 400 beef / hour.
- Designed for optimum handling and maneuverability.
- Robust stainless steel construction, including solid stainless steel blades and single piece clevis for best possible hygiene and low maintenance.
- Greasable pivot points for extended life.
- Anti-tie down controls for operator safety.
- Meets national and international requirements for safety and hygiene.



HIGH PERFORMANCE - RELIABLE

FOREQUARTER CUTTER

Model 50CL

Specifications

Drive	Electric-hydraulic
-------	--------------------

Model 50CL

Cutting Force	9900 lb-f	44 kN
Cutting Cycle Time		1.6 sec
Control Handles		
Pneumatic Dual Anti-tie Down	50 psi	3.5 bar
Blade Opening	11.7 in	297 mm
Overall Length	48 in	1219 mm
Weight	83 lbs	37.6 kg

Hydraulic Power Unit

Motor Power	7.5 hp	5593 W
Operating Voltage	230 / 460 V, 3 phase, 60 Hz	other voltages and 50 Hz available
Hose Length	16 ft	5 m
Oil Capacity	30 gal	113.6 L
Overall Dimensions (l x w x h)	28.5 x 22.5 x 28 in	724 x 572x 711 mm
Weight (without oil)	375 lbs	170 kg

Equipment Selection and Accessories	Order Number
-------------------------------------	--------------

<p>Model 50CL</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding-left: 40px;">Left Side (Standard)</td> <td style="text-align: right;">4025073</td> </tr> <tr> <td style="padding-left: 40px;">Right Side (Standard)</td> <td style="text-align: right;">4025081</td> </tr> <tr> <td style="padding-left: 40px;">Left Side (Heavy Duty)</td> <td style="text-align: right;">4025093</td> </tr> <tr> <td style="padding-left: 40px;">Right Side (Heavy Duty)</td> <td style="text-align: right;">4025092</td> </tr> </table> <hr/> <p>Hydraulic Power Unit</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding-left: 40px;">with control box and hoses 230 / 460 V, 3 phase, 60 Hz*</td> <td style="text-align: right;">4027151</td> </tr> </table> <hr/> <p>Balancer</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td></td> <td style="text-align: right;">4042025</td> </tr> </table> <hr/> <p>Blade</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding-left: 40px;">Left Side</td> <td style="text-align: right;">1023360</td> </tr> <tr> <td style="padding-left: 40px;">Right Side</td> <td style="text-align: right;">1023413</td> </tr> </table> <hr/>	Left Side (Standard)	4025073	Right Side (Standard)	4025081	Left Side (Heavy Duty)	4025093	Right Side (Heavy Duty)	4025092	with control box and hoses 230 / 460 V, 3 phase, 60 Hz*	4027151		4042025	Left Side	1023360	Right Side	1023413	
Left Side (Standard)	4025073																
Right Side (Standard)	4025081																
Left Side (Heavy Duty)	4025093																
Right Side (Heavy Duty)	4025092																
with control box and hoses 230 / 460 V, 3 phase, 60 Hz*	4027151																
	4042025																
Left Side	1023360																
Right Side	1023413																

** For other configurations: please specify voltage, hertz and intended country of operation when ordering.*



Products for the meat and poultry industry